



HENDRICKSON

PR5500PP Preset Pressure Regulator with Pressure Protection

- Holds outlet pressure to no more than 7 PSI above preset pressure during static (no flow) conditions.
- Wide range of operation
0 to 12 GPM (0 to 720 gallons per hour).
- 10, 20, 30, 40 and 50 PSI preset pressures available.
- High-strength ABS construction.
- Thread options available for all installations.
- Maximum inlet pressure 120 PSI

Applications

- For systems with downstream valve components that require pressure protection.
- Animal watering systems
- Garden hoses
- Tanks

The PR5500PP offers exceptional outlet pressure control to provide consistent performance from 0 to 720 gallons per hour. The PR5500PP effectively regulates at the following pressures: 10, 20, 30, 40 and 50 PSI, all preset to exacting factory specifications.

The unique design of the PR5500PP utilizes a minimum of moving parts in a sophisticated diaphragm design that regulates itself in reaction to the overall system back pressure. The PR5500PP is constructed of high strength ABS plastic and all joints are sonic welded into a tamper proof and impact resistant container. A variety of thread options are available for all installation specifications.

All Hendrickson Bros. irrigation products are produced from the highest quality materials. Quality assurance testing for overall quality, performance, and durability are ongoing at Hendrickson Bros.

**RECOMMENDED FOR OUTDOOR USE ONLY




HENDRICKSON BROS.


2931 Rimpau Avenue, Corona, CA 92881-3625
(951) 737-6822 • Fax (951) 737-9151
www.hendricksonbros.com

©2005 Hendrickson Bros.


MADE IN USA

PR5500PP Preset Pressure Regulator with Pressure Protection


PR5510PP Performance Data

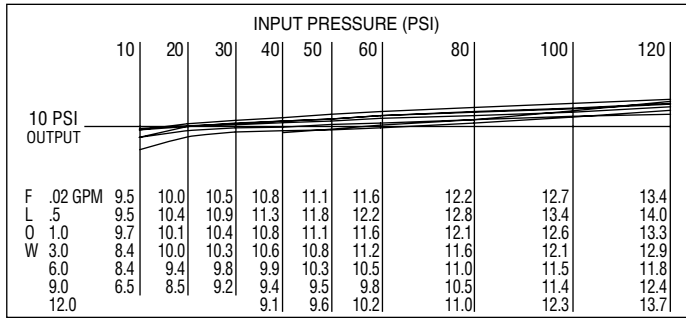


PR5540PP Performance Data

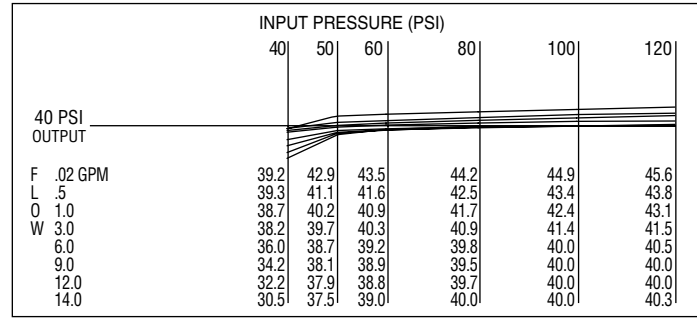


PR5520PP Performance Data

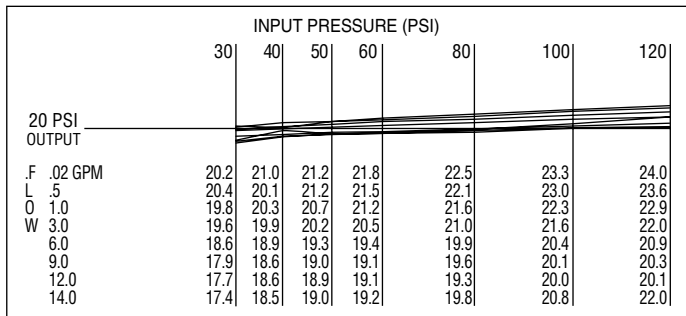

PR5550PP Performance Data

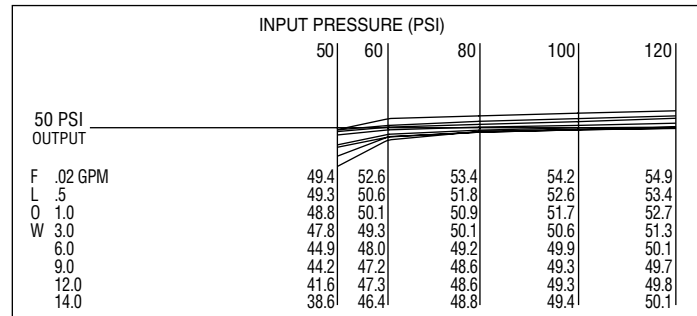

PR5530PP Performance Data

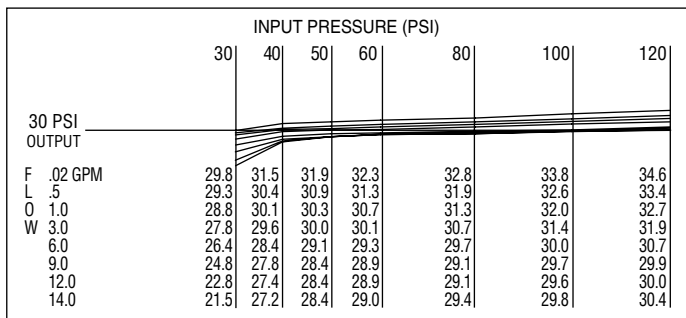

Specifications

Materials:

Body Chemical resistant ABS Plastic
 Diaphragm EPDM
 Spring Stainless Steel

Inlet 3/4" FIPT (standard)*

Outlet 3/4" MIPT (standard)*

Overall Length 3.50"

Outside Diameter 1.625"

Operating Pressure Range 0-120 PSI

*See price list for other inlet/outlet thread configurations.



2931 Rimpau Avenue, Corona, CA 92881-3625
 (951) 737-6822 Fax (951) 737-9151
 www.hendricksonbros.com

©2005 Hendrickson Bros.

MADE IN USA